

**Specifications**

<b>Display Technology</b>	Single 0.55" 480p 12-degree DarkChip2™ DLP™ technology by Texas Instruments	
<b>Brightness (typical)</b>	1,000 lumens	
<b>Resolution</b>	480P (854x480) native, up to SXGA (1,280 x 1,024) compressed	
<b>Dimensions (WxHxD)</b>	14.5 x 4.6 x 10.7 inches (368 x 117 x 273mm)	
<b>Contrast Ratio (full on/full off)</b>	4,000:1 (with Image AITM™)	
<b>Noise Level (typical)</b>	28 dB (STD) / 27 dB (ECO)	
<b>Lamp Type</b>	200-watt Lamp	
<b>Lamp Life (typical)</b>	2,000 (STD) / 3,000 (ECO) hours	
<b>Image Size (diagonal)</b>	36 to 359 inches	
<b>Projection Distance</b>	3.28 to 32.8 feet (1 to 10m)	
<b>Computer Compatibility</b>	SXGA+, XGA, SVGA, VGA compression, VESA standards, PC & compatibles, Macintosh	
<b>Video Compatibility</b>	NTSC (M, 3.58/4.43 MHz), PAL (B, D, G, H, I, M, N), SECAM (B, D, G, K, K1, L), HDTV (720p, 1080i), EDTV (480p), SDTV (480i), 576i/p	
<b>Aspect Ratio</b>	16:9 native, 4:3 & 5:4 compatible, letterbox standard	
<b>Projection Lens</b>	1:1.11 manual zoom and focus	
<b>Keystone Correction</b>	+/- 15 degree	
<b>Throw Ratio (distance/width)</b>	1.26 - 1.49	<b>PROJECTION DISTANCE VS. IMAGE SIZE</b>
<b>Horizontal Scan Rate</b>	31.5 to 100 kHz	<b>Projection Distance</b>
<b>Vertical Refresh Rate</b>	43 to 120 Hz	<b>16:9 Diagonal Image Size</b>
<b>Displayable Colors</b>	16.7 Million	5.5 feet (1.67m)
<b>Uniformity</b>	90%	60 inches
<b>Speakers</b>	Two 5 Watt Stereo	7.3 feet (2.23m)
<b>Power Supply</b>	100 - 240 volts, 50 / 60 Hz	8.4 feet (2.57m)
<b>Power Consumption</b>	285 watts (maximum), standby mode <14 watts	9.7 feet (2.96m)
<b>Projection Method</b>	Front desk top/rear desktop	11.0 feet (3.35m)
<b>Operating Temperature</b>	41 - 95°F (5 - 35°C) (80% humidity)	
<b>I/O Connectors</b>	Composite (RCA), D-sub15 VGA (analog RGB/component/HDTV), S-Video, RS-232 communication, Stereo audio in, Stereo audio out, Optical audio out, AC power input.	
<b>Weight</b>	8.25 lbs (3.75kgs)	
<b>Standard Accessories</b>	AC power cord (1.8m), Composite cable, Remote control, Batteries for remote, Users guide, Lens cap (hanging), 15-pin to 3 RCA component/HDTV hookup, Carrying case	
<b>Optional Accessories</b>	Panoview Graywolf 1.8 Gain Screen, Dolben Kreiling 50-watt Subwoofer	

All specifications are subject to change without notice.

**Optional Accessories**



www.optoma.com © 2005 Optoma Corporation. All company and/or product names mentioned herein are trademarks and/or registered trademarks of their respective manufacturers. DLP™ and the DLP™ medallion are trademarks of Texas Instruments.



**MovieTime™**  
Digital DVD Projector

The Evolution of Home Entertainment

**Simple set-up** means plug it in and point it at the wall – you instantly get professional grade cinema without the hassle of extra cabling.


**Light-weight and portable** allows you to carry it anywhere, from a presentation meeting to a friend's house for movie night.

**Short-throw lens** of 1.26 - 1.41 enables you to turn any room in your house into a screening room. Perfect for big pictures in tight spaces!



**MovieTime™** The Evolution of Home Entertainment

- ➔ The revolutionary Digital projector with integrated DVD player, two 5 watt speakers and short throw lens make it a snap to turn any space into a movie theater - instantly!
- ➔ Designed perfectly for a wide range of home entertainment applications – viewing the latest blockbuster, playing games, or watching home movies with friends and family.
- ➔ Just plug in, point it at the wall and presto! - Professional grade cinema without the hassle of extra cabling. Always perfect, always easy!
- ➔ Optical audio output is ideal for connection to Dolby® 5.1 surround system. Add an external subwoofer to complete your 2.1 surround sound experience.

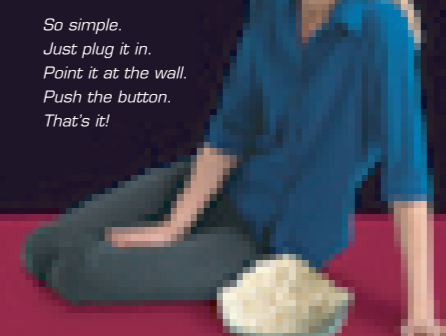

So simple. Just plug it in. Point it at the wall. Push the button. That's it!



"...MovieTime is the iMac of home theater"  
New York Times March 3, 2005.



Small size and light weight

means you can take it anywhere!

see back for optional accessories ▶